


TIP - HOW TO FOLD THE WING

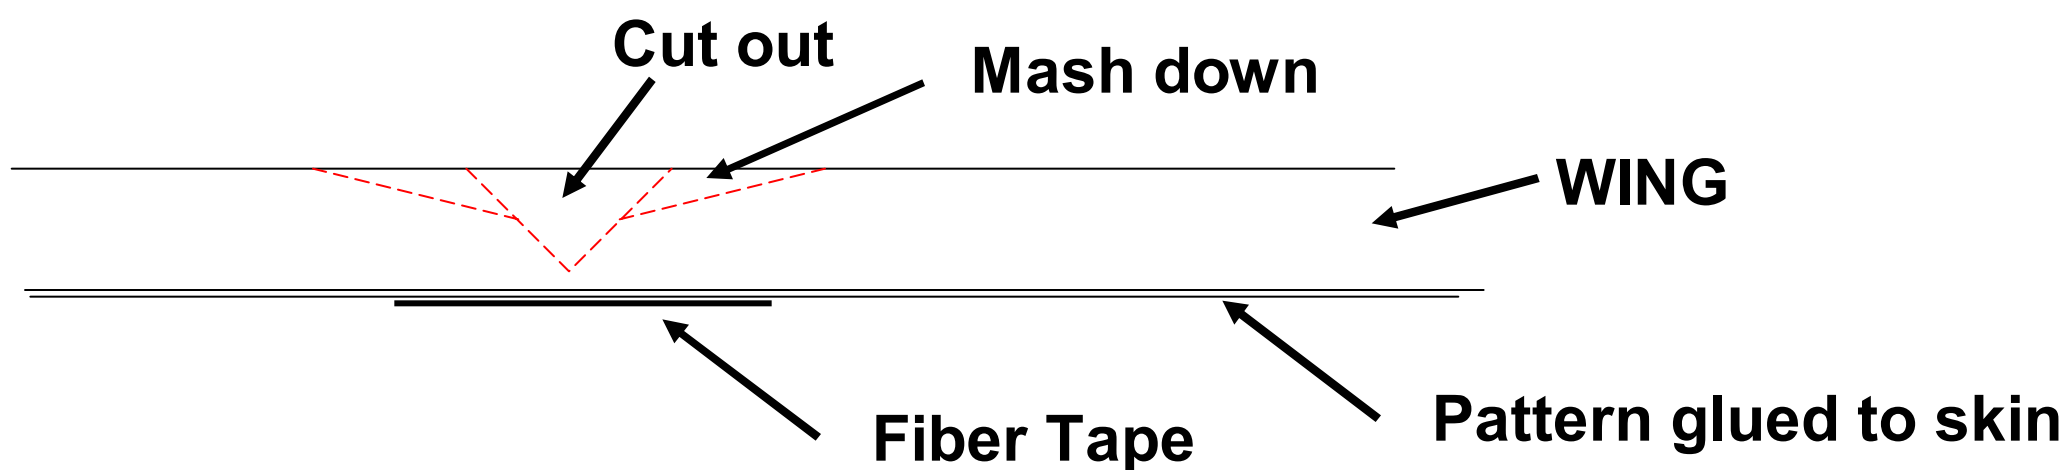

To fold wing, stick pattern to the plastic skin of one side of the blue foam with spray adhesive. Put a piece of fiber tape along the fold line of the pattern side. Remove skin from inside. Cut out 45 degree groove, but don't cut all the way through. Then use a small tube or rod and mash the foam down to relieve some of the pressure of the fold. You might want to sand the taper to the trailing edges before doing the above procedure. I used a hot glue gun and ran a bead of glue along the groove and quickly folded one side at a time over and held it flat till the glue cooled. Carefully peel the pattern and skin from wing.

I don't know where C.G. will be or where motor mount, servos, battery, receiver...etc will be located yet.

Thanks to Blueman(Robb) for the concept and Inspiration!

